

Automobile Wire 100°C


Product Description

- Rated temperature: 100°C.
- Reference standard: JASO D 608 / 1992.
- Bared, stranded copper conductor, 0.5-8mm².
- XL-PVC insulation, RoHS compliant.
- Passed JASO D 608 / 1992 5.9 resist-flame test.
- Uniform thickness of wire to ensure easy cutting and stripping.

Applications

- For internal wiring of automobiles.

Structure & electrical properties

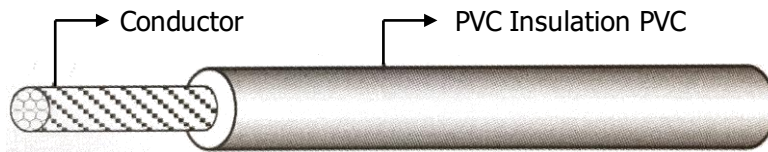

STYLE	Conductor			Insulation		Packaging Length		MAX.COND. Resistance (Ω/km,20°C, DC)
	Cross section (mm ²)	No./mm	DIA. (mm)	Thickness (mm)	Overall Diameter (mm)	Ft/Coil	M/Coil	
AVX	0.5f	20/0.18	0.93	0.59	2.10	2000	610	36.7
	0.5	7/0.32	0.96	0.57				
	0.75f	30/0.18	1.14	0.58	2.30			24.4
	0.85	11/0.32	1.22	0.54				20.8
	1.25f	50/0.18	1.47	0.67	2.80	14.7		
	1.25	16/0.32	1.48	0.66		14.3		
	2	26/0.32	1.88		3.20	1000	305	8.81
	3	41/0.32	2.36	3.90	5.59			
	5	65/0.32	2.98	4.70	3.52			
	8	50/0.45	3.67	5.40	330			100