

**Automobile Wire 80°C**


**Product Description**

- Rated temperature: 80°C.
- Reference standard: JASO D 611 / 1994.
- Bared, stranded copper conductor, 0.3-1.25mm<sup>2</sup>.
- Lead free PVC insulation, RoHS compliant.
- Passed JASO D 611 / 1994 5.9 resist-flame test.
- Uniform thickness of wire to ensure easy cutting and stripping.

**Applications**

- For internal wiring of automobiles.

**Structure & electrical properties**

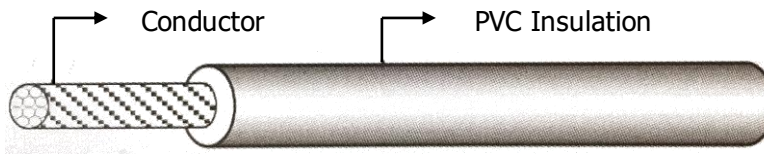

STYLE	Conductor			Insulation		Packaging Length		MAX. COND. Resistance (Ω/km,20°C, DC)
	Cross section (mm <sup>2</sup> )	No./mm	DIA. (mm)	Thickness (mm)	Overall Diameter (mm)	Ft/Coil	M/Coil	
CAVS	0.3	7/0.26 (Tight)	0.70	0.38	1.45	2000	610	50.2
	0.5	7/0.32 (Tight)	0.90		1.65			32.7
	0.85	7/0.40 (Tight)	1.10		1.85			20.8
		11/0.32 (Tight)			1.85			20.8
	1.25	16/0.32 (Tight)	1.40		2.15			14.3