

Automobile Wire 80°C


Product Description

- Rated temperature: 80°C.
- Reference standard: SAE J 1128 / 1995.
- Tinnes, bared, stranded copper conductor, 20-8AWG.
- Lead free PVC insulation, RoHS compliant.
- Passed SAE J 1128 / 1995 5.6 resist-flame test.
- Uniform thickness of wire to ensure easy cutting and stripping.

Applications

- For internal wiring of automobiles.

Structure & electrical properties

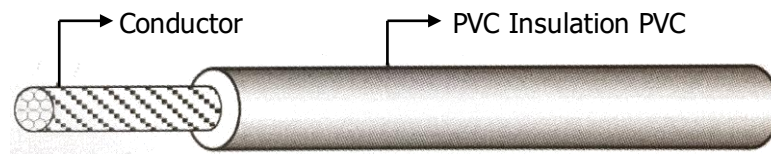

STYLE	Conductor				Insulation		Packaging Length		MAX.COND. Resistance (Ω/km,20°C, DC)		
	AWG	Cross section (mm ²)	No./mm	DIA. (mm)	Thickness (mm)	Overall Diameter (mm)	Ft/Coil	M/Coil			
HDT	20	0.50	7/0.31	0.93	0.94	2.80	2000	610	36.7		
	18	0.80	16/0.254	1.17	0.97	3.10			1000	305	21.8
	16	1	26/0.254	1.49	1.06	3.60					13.7
	14	2	19/0.36	1.80	1.10	4.00					8.62
	12	3	19/0.45	2.25	1.28	4.80	330	100	5.43		
	10	5	19/0.57	2.85		5.40			3.41		
	8	8	19/0.71	3.55	1.53	6.60			2.14		