

Rubber Insulated Flexible Cords**Product Description**

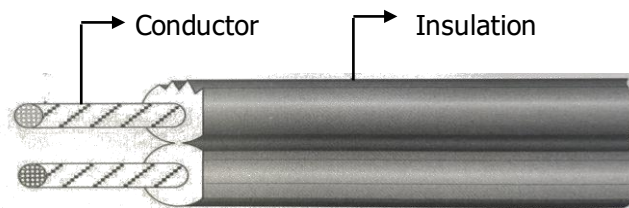
- Tinned or bare, stranded or solid copper conductor.
- Rubber Insulation.
- Rated voltage: 300V/500V.
- Method of inspection: According to JIS C 3005&3301
- Passed Japan JIS C 3005 flame test.

Technical Specification

- Insulation Potential Strength: 3000 VAC/min
- Rated Voltage: 300/500 Volts
- Dimension Tolerance: ± 0.10 mm.

Applications

- For Internal wiring of appliances.

Structure & electrical properties

TYPE	Cross section (mm ²)	Conductor No./mm	Insulation Thickness (mm)	Overall Diameter (mm)	Maximum Conductor Resistance (Ω /km)
HHFF	0.75	30/0.180	1.00	3.20x6.40	24.4
		67/0.120			
	1.25	50/0.180		3.60x7.20	14.7
		112/0.120			
	2.00	37/0.260		3.90x7.80	9.50
		80/0.180			