

Hook-up Wire 105°C 600V

Product Description

- Solid or stranded tinned or bare copper conductor,18-1 AWG
- Lead Free PVC Insulation.
- Rated temperature: 105°C, Rated voltage:600volts.
- Uniform thickness of wire to ensure easy stripping and cutting.
- Passes UL VW-1 & CSA FT1 vertical flame test.


Technical Specification

- Insulation Potential Strength: 2000 VAC/min
- UL Rated temperature: 105°C.
- Rated Voltage: 600 Volts.

Applications

- For internal wiring of appliances.

Structure & electrical properties

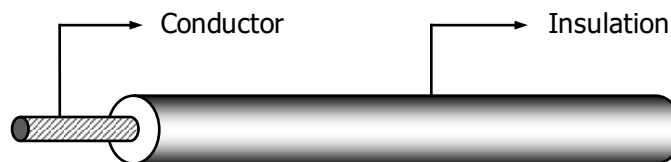

UL 10070 CSA TEW	Conductor		Insulation	Overall Diameter (mm)	Tolerance (mm)	Maximum Conductor Resistance (Ω/km)	Minimum Insulation Resistane (M Ω/km)	Permitable Current (A)
	AWG	No./mm	Thickness (mm)					
Stranded	18	65/0.127	0.76	2.90	±0.15	24.4	15	18
	16	7*15/0.127		3.40		15.6		24
	14	7*24/0.127		3.80		9.90		33
	12	7*37/0.127		4.30		6.24		45
	10	7*59/0.127		5.00		4.15		58
	8	7*95/0.127	1.15	6.75	±0.25	3.48		75
	6	7*150/0.127	1.50	8.50	±0.30	1.58		105