

**PVC Insulated Wire 60°C/75°C 300V****Product Description**

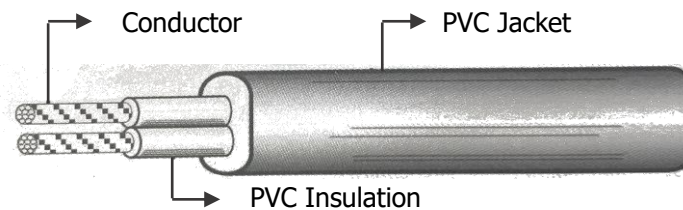
- Bared, Stranded or solid copper conductor.
- Lead Free PVC Insulation.
- Rated temperature: 60°C/75°C; voltage: 300V.
- Reference standard: JIS C 3306

**Technical Specification**

- Insulation Potential Strength: 3000 VAC/min
- UL Rated temperature: 60°C/75°C.
- Rated Voltage: 300 Volts

**Applications**

- For indoor small electrical instruments.

**Structure & electrical properties**

TYPE	Cross Section (mm <sup>2</sup> )	No./mm	Insulation		Jacket		Maximum Conductor Resistance (Ω/km)
			Thickness (mm)	Overall Diameter (mm)	Thickness (mm)	Overall Diameter (mm)	
VCTFK	2x0.75	30/0.180	0.60	2.40	1.00	4.30x6.60	25.1
	2x1.25	50/0.180		2.80		4.70x7.40	15.1
	2x2.00	37/0.260		3.10		5.00x8.00	9.79
HVCTFK	2x0.75	30/0.180		2.40		4.30x6.60	25.1
	2x1.25	50/0.180		2.80		4.70x7.40	15.1
	2x2.00	37/0.260		3.10		5.00x8.00	9.79

