

Automobile Wire 100°C


Product Description

- Rated temperature: 100°C.
- Reference standard: JASO D 608 / 1992.
- Bared, stranded copper conductor, 0.3-1.25mm².
- Heat-resist PVC insulation, RoHS compliant.
- Passed JASO D 608 / 1992 5.9 resist-flame test.
- Uniform thickness of wire to ensure easy cutting and stripping.

Applications

- For internal wiring of automobiles.

Structure & electrical properties

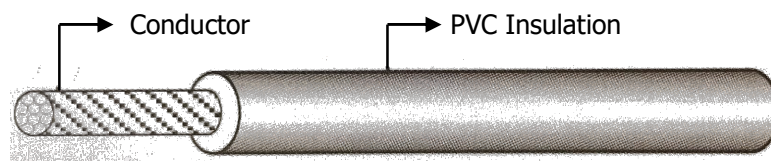

STYLE	Conductor			Insulation		Packaging Length		MAX.COND. Resistance (Ω/km,20°C, DC)
	Cross section (mm ²)	No./mm	DIA. (mm)	Thickness (mm)	Overall Diameter (mm)	Ft/Coil	M/Coil	
AVSSH	0.30f	19/0.16	0.80	0.30	1.40	2000	610	48.8
	0.50f	19/0.19	1.00		1.60			34.6
	0.75f	19/0.23	1.20		1.80			23.6
	1.25f	37/0.21	1.50		2.10			14.6