

**Automobile Wire 105°C**


**Product Description**

- Rated temperature: 105°C.
- Reference standard: JB/T 8139 – 1999.
- Bared, stranded copper conductor, 0.2-10mm<sup>2</sup>.
- Lead free PVC insulation, RoHS compliant.
- Passed JB/T 8139-1999 6.5.8 resist-flame test.
- Uniform thickness of wire to ensure easy cutting and stripping.

**Applications**

- For internal wiring of automobiles.

**Structure & electrical properties**

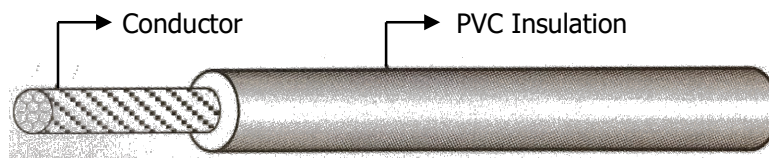

STYLE	Conductor			Insulation		Packaging Length		MAX.COND. Resistance (Ω/km,20°C, DC)
	Cross section (mm <sup>2</sup> )	No./mm	DIA. (mm)	Thickness (mm)	Overall Diameter (mm)	Ft/Coil	M/Coil	
QVR-105	0.2	12/0.15	0.60	0.33	1.25	2000	610	95.0
	0.3	16/0.15	0.69		1.35			71.2
	0.4	23/0.15	0.83	0.34	1.50			49.6
	0.5	16/0.20	0.92	0.64	2.20			40.1
	0.75	24/0.20	1.13	0.69	2.50			26.7
	1.0	32/0.20	1.31	0.65	2.60	20.0		
	1.5	30/0.25	1.58	0.64	2.85	13.7		
	2.5	49/0.25	2.02	0.74	3.50	1000	305	8.21
	4	56/0.30	2.59	0.91	4.40			5.09
	6	84/0.30	3.17	0.87	4.90			3.39
10	84/0.40	4.23	1.04	6.30	330	100	1.95	